

XtraforsBL AC Servomotors



Features

- Compact size
- High torque
- Low inertia
- High speed

Power

- Rated torque 0.3 to 78 Nm
- Sizes 40 to 190 mm

Executions

- Wide range of standard models
- Customized versions
- CE certified, UL listed


XtraforsBL, AC Servomotors

This family offers the user a wide range of standard motors.
The excellent torque /inertia-ratio gives these motors an extremely high acceleration capability.

Technical data

Type	Torque	Speed	Winding A			Winding 4		Length L *	
			(230VAC)			(400VAC)			
	M _{nom}	n _{nom}	I _{nom}	n _{max}	n _{max}	I _{nom}	n _{max}	without	with
				@230V	@400V		@400V	brake	brake
	[Nm]	[rpm]	[Arms]	[rpm]	[rpm]	[Arms]	[rpm]	[mm]	[mm]
BL 040	0.30	8 000	1.03	10 000	10 000	–	–	112	139
BL 055	0.54	6 500	1.09	7 700	10 000	0.60	7 000	140	170
BL 071	0.69	8 000	1.81	8 200	11 000	0.97	10 000	100	128
BL 072	1.76	6 000	3.67	7 600	11 000	2.20	7 800	120	148
BL 073	2.41	3 800	3.49	5 300	8 200	1.96	5 500	138	166
BL 074	2.60	3 800	3.21	4 600	7 100	1.65	4 500	156	184
BL 111	2.80	3 000	3.37	4 300	6 900	1.96	4 400	165	165
BL 112	4.80	3 000	5.78	4 400	7 100	3.16	4 400	190	190
BL 113	8.10	3 000	9.53	4 700	7 400	5.51	4 400	215	215
BL 114	9.10	3 000	10.96	4 900	7 900	5.59	4 400	240	240
BL 115	11.20	3 000	13.83	4 700	7 700	7.89	4 400	265	265
BL 141	12.00	3 000	12.00	3 700	6 000	6.18	3 500	235	235
BL 142	15.20	2 500	13.45	3 300	5 400	7.00	3 000	256	256
BL 143	23.70	2 000	16.93	2 750	4 500	9.01	2 500	300	300
BL 144	32.00	1 500	17.02	2 300	3 700	9.09	1 900	342	342
BL 191	52.00	2 000	–	–	–	23.32	2 800	261	315
BL 192	78.00	2 000	–	–	–	32.91	2 500	318	372

Torque curves

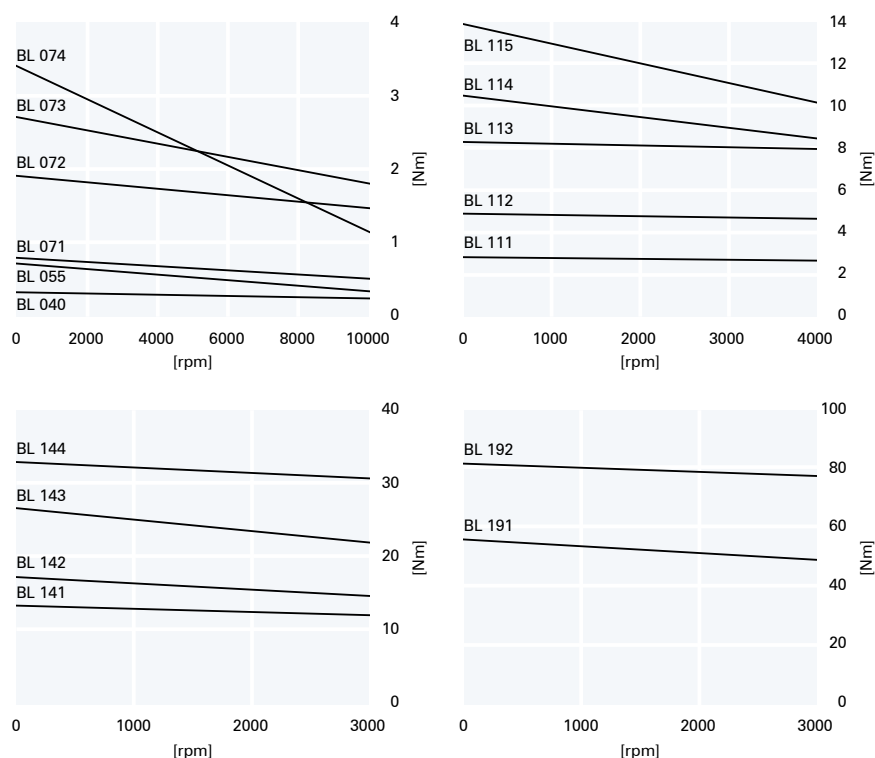

Standard version

- Resolver feedback
- Shaft with keyway
- Protection IP-65
- Angled connectors
- NTC thermal sensor
- 230 V or 400 V winding

Options

- Various types of incremental encoders, SinCos encoders, Hiperface, EnDat
- Shaft without keyway
- Protection IP-67
- Shaft seal
- Straight connectors
- Direct cable output
- PTC thermal sensor

Customized versions

- Shafts (i.e. hollow shafts)
- Flanges, housings
- Windings
- Connections
- Executions according to customer's specification

Technical drawing of a MAVILOR MOTOR, showing side and front views with dimension labels.

Side View (Left):

- $\varnothing A$: Total height of the motor.
- $\varnothing D$: Diameter of the mounting flange.
- F : Thickness of the mounting flange.
- E : Distance from the mounting flange to the start of the main body.
- L^* : Total length of the motor.
- G : Distance from the top of the motor to the center of the mounting flange.

Front View (Right):

- K : Total height of the motor.
- $\varnothing B$: Diameter of the mounting flange (indicated by a diagonal line).
- H : Total width of the motor.
- $\varnothing C$: Diameter of the mounting flange (indicated by a horizontal line).

The motor body features a label that reads "MAVILOR MOTORS".

Brakes

Motor Type	BL 040	BL 055	BL 071-072	BL 073-074	BL 111-112	BL 113-115	BL 140	BL 190
Torque [Nm]	0.4	0.75	1.5	3.0	8.0	12.0	20.0	72.0
Voltage [VDC]	24 (+6% – 10%)							

Addresses

Switzerland

Infranor SA

Place de la Gare 5
CH-1296 Coppet

Phone +41 22 960 70 70
Fax +41 22 960 70 80

www.infranor.ch
infranor@infranor.ch

Infranor AG

Schaffhauserstrasse 418
CH-8050 Zürich

Phone +41 44 308 50 00
Fax +41 44 308 50 09

www.infranor.ch
infranor@infranor.ch

Germany

Infranor GmbH

Donaustrasse 19a
D-63452 Hanau

Phone +49 6181 18012 0
Fax +49 6181 18012 90

www.infranor.de
info@infranor.de

France

Infranor SAS

3, avenue Louis Delage
F-91310 Linas

Phone +33 1 69 633 515
Fax +33 1 69 633 516

www.infranor-france.com
infranor@infranorfrance.com

Spain

Infranor Spain SL

Occitània, 24
E-08911 Badalona
(Barcelona)

Phone +34 93 460 16 31
Fax +34 93 399 96 08

www.infranor.es
infranor@infranor.es

Benelux

Infranor B.V.

Albert Einsteinstraat 6
NL-3261 LP Oud-Beijerland

Phone +31 186 610 155
Fax +31 186 614 535

www.infranor.nl
info@infranor.nl

England

Infranor Ltd.

Unit 60A, Smithbrook Kilns
Cranleigh
UK-Surrey GU6 8JJ

Phone +44 1483 274 887
Fax +44 1483 276 037

www.infranor.ltd.uk
sales@infranor.ltd.uk

USA

Infranor, Inc.

299 Ballardvale Street Suite 4
USA-Wilmington, MA 01887

Phone +1 978 988 9002
Fax +1 978 988 9112

www.infranorusa.com
info@infranorusa.com

China

Infranor Motion Control Technology (Shanghai) Co., Ltd.

Room 4E, Building A4
No. 700 Yishan Rd
CN-200233 Shanghai

Phone +86 21 6440 1095
Fax +86 21 6440 1095

www.infranor.cn
info@infranor.cn



The Infranor Group

Infranor creates added value for its customers by providing tailor-made motion solutions.

Based on strong working relationships, Infranor offers extensive market know-how, comprehensive engineering skills and a wide range of high-quality products leading to productivity gains and therefore to comparative advantages for its customers in their respective markets.

The Infranor Brand

The Infranor Brand is a synonym for:

- Excellence
- Cooperation
- Added value